


Water 4 Dairy ozone water systems

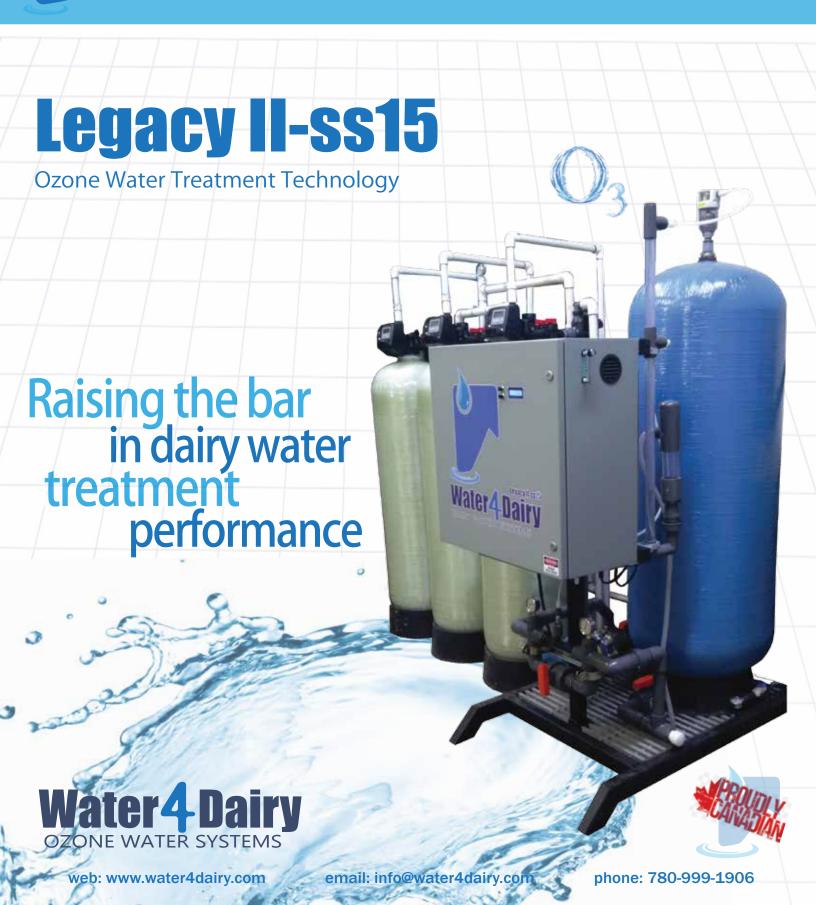

Benefits and Specifications

Legacy II-ss15

Product Information and Specifications

- On board 93% +/- 3% 7.5 scfh (4 lpm) @ 10 psig oxygen concentrator
- Ozone output 15.0 grams per hour @ 7.5 scfh
 5.0% concentration by weight
- System information and diagnostics (sid) lcd display
- Self resonating ozone generation reaction chamber
- CSA certified time delay enclosure and control panel
- Adjustable mazzie injection manifold with pre and post gauges
- 120 gal mass transfer micro-bubbling contact tank
- Available in 0 30 gpm flow rates
- Adjustable mazzie manifold with pre/post pressure gauges
- Schd 80 plumbing
- Ozone destruct unit with j valve
- 1 hp stainless Gould recirculation booster pump

System customized to your dairy's infrastructure

- Water is treated when you need it
- Reduces system footprint due to no onsite water storage requirements
- System plugs into your existing water infrastructure minimizing onsite installation costs

Water 4 Dairy OZONE WATER SYSTEMS








Height

Optimizing your dairy's productivity

- Improve milk production & butterfat content
- Stabilize water quality to your herd
- Improve animal and overall herd health due to better hydration
- Improve performance from water related dairy equipment and infrastructure such as water lines and robots
- No ongoing chemical costs



(Legacy ii ss-15)				
Electrical	230V / 20A			
Water	0 - 30 gpm max			
Ozone	15 grams/hour @ 7.5 scfh oxygen			

nit width	Length
	_

Offic Wi	uui	Lengur		i icigiii	\
Standard	d Metric	Standard	Metric	Standard	Metric
34inch	85cm	64inch	160cm	80inch	200cm